




Quam

C5/BU/CK1/x

Clock Baffle with Speaker, 25-70.7V Transformer

0102 - SURFACE MOUNTED LOUDSPEAKER SYSTEM

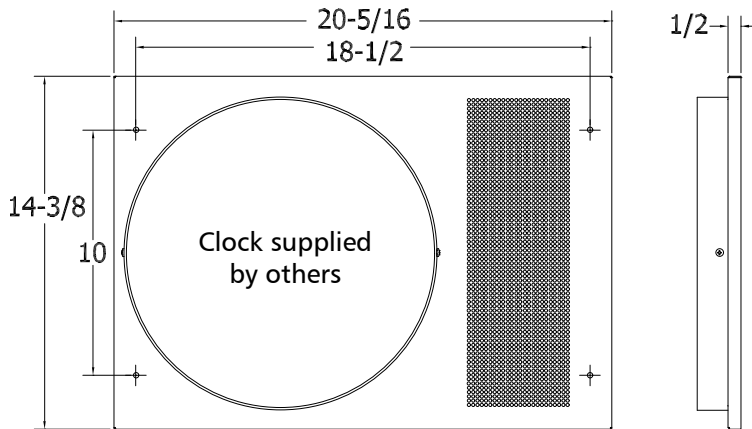

Loudspeaker Baffle shown
in 'RIGHT' position



Loudspeaker Baffle shown
in 'Down' position

GENERAL DESCRIPTION

The QUAM C5/BU/CK1/x a complete loudspeaker assembly with a 8" O.D. full range speaker, 25/70.7V transformer and 16 gage steel baffle.
Clock mechanism is supplied by others.
Finish: White baked epoxy hybrid.

INTENDED USE

Used with listed analog repeater clock mechanisms supplied by others. Loudspeaker may be oriented up, down, left or right of the display; indoor environment.
Program Material: Music, voice and signal tones

SYSTEM COMPONENTS

Loudspeaker	8C5PAX
Transformer	5W*, 25 and 70.7V, pigtail (TBLU)

*5W, 2.5W, 1.25W, 0.63W, 0.31W

Baffle

C5/BU/CK1/D	DuKane® analog
C5/BU/CK1/S	Sapling® analog

REQUIRED ADDITIONAL QUAM COMPONENT

Section 0401.2- ES8-CK Flush mount box for CK1/x baffle
-or-

Section 0403- SE9W Surface mount box for CK1/x baffle

AUDIO SPECIFICATIONS

Average Sensitivity	92 dB-SPL, 1W/1M
Power Rating	12W RMS, EIA 426A Standard
Calculated Maximum System Output	99 dB-SPL, 5W/1M
Magnet Type, Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65Hz- 17 kHz, EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB/ 2 kHz, Half Space
Audio Connection	7" Long Tinned Wires, Pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats in the Quam Architects' and Engineers' Resources section on the web at: www.QuamSpeakers.com

LOUDSPEAKER ASSEMBLIES 01

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
Phone: (800) NEED NOW Fax: (888) NEED NOW
(800) 633 - 3669 (888) 633 - 3669
E-Mail: neednow@qnc.com www.quamspeakers.com

