




## 0180 - WIRING DIAGRAM

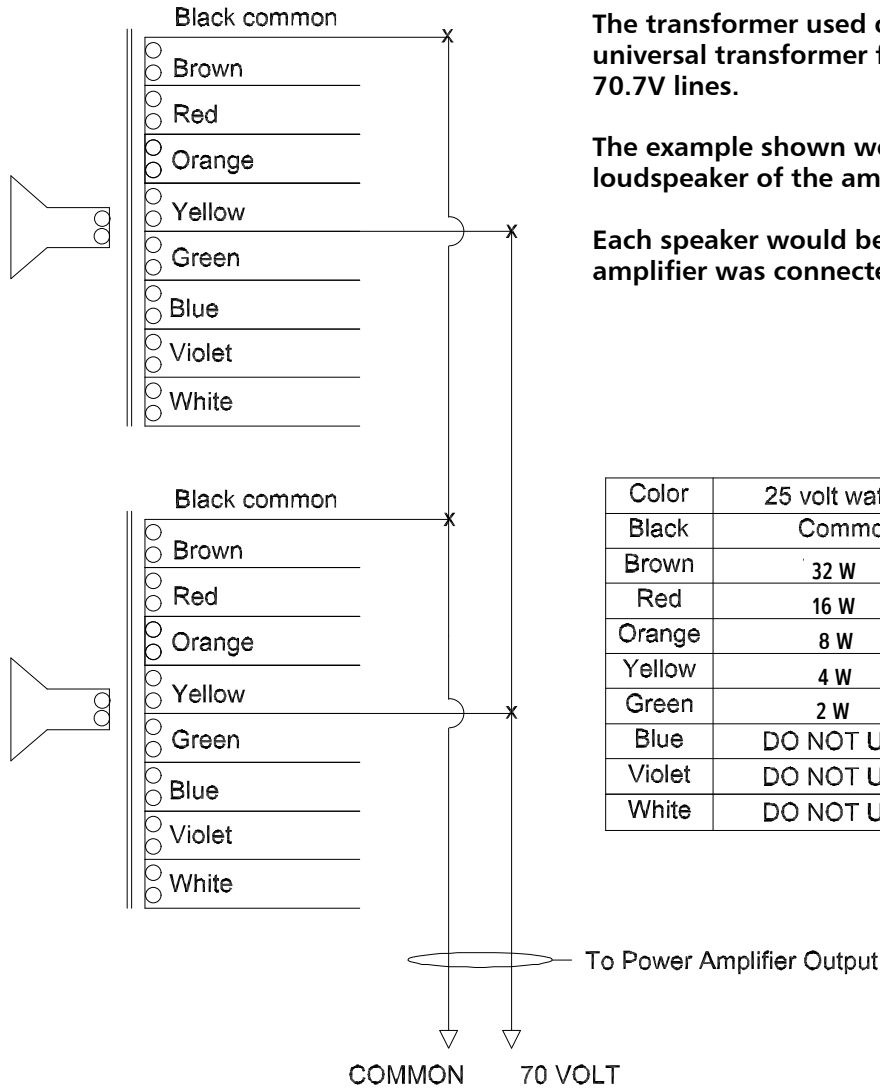

The transformer used on the ABOVE MODEL is a universal transformer for use with either 25 or 70.7V lines.

The example shown would supply 4W to the loudspeaker of the amplifier for 25V.

Each speaker would be supplied with 32W if the amplifier was connected for 70.7V.

Color	25 volt wattage	70 volt wattage
Black	Common	Common
Brown	32 W	DO NOT USE
Red	16 W	DO NOT USE
Orange	8 W	DO NOT USE
Yellow	4 W	32 W
Green	2 W	16 W
Blue	DO NOT USE	8 W
Violet	DO NOT USE	4 W
White	DO NOT USE	2 W

**LOUDSPEAKER ASSEMBLIES 01**

\*Note: Each unused transformer tap must be insulated from each other and from ground.

Transformer color codes and values are shown for the H32 transformer only

### Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637  
 Phone: (800) NEED NOW Fax: (888) NEED NOW  
 (800) 633 - 3669 (888) 633 - 3669  
 E-Mail: neednow@qnc.com www.quamspeakers.com