




Quam

SYSTEM 10/VC Compact, Shallow, Wall Mount Loudspeaker

01
LOUDSPEAKER ASSEMBLIES

0102 - SURFACE MOUNTED SPEAKER SYSTEMS

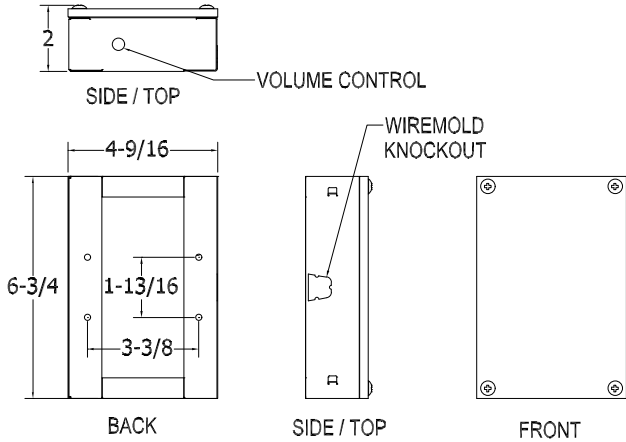

GENERAL DESCRIPTION

The QUAM SYSTEM 10 is a complete loudspeaker assembly with a 4" O.D. full range speaker, 5W- 25/70.7V pigtail transformer with volume control, wood baffle with cloth wrapped grille and 22 gage steel enclosure.

Finish: Black baked epoxy hybrid enclosure, wood baffle, charcoal gray cloth wrap.

INTENDED USE

Indoor environment, surface mount
Program Material: Signal tones and voice

SYSTEM COMPONENTS

Loudspeaker	4C3PA
Transformer	5W*, 25/70.7V pigtail (TBLU)
Attenuator	Model VC- Continuous

*5W, 2.5W, 1.25W, 0.63W, 0.31W

AUDIO SPECIFICATIONS

Average Sensitivity	96 dB SPL, 1W/ 1M
Loudspeaker Power Rating	10W RMS, EIA 426A Standard
Calculated Maximum System Output	103 dB SPL, 5W/ 1M
Frequency Response	180 Hz - 10 kHz EIA 462A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
 Phone: (800) NEED NOW Fax: (888) NEED NOW
 (800) 633 - 3669 (888) 633 - 3669
 E-Mail: neednow@qnc.com www.quamspeakers.com

