




Quam

SYSTEM 2 Wall Mount, Slanted, White

01

LOUDSPEAKER ASSEMBLIES

0102 - SURFACE MOUNTED SPEAKER SYSTEM

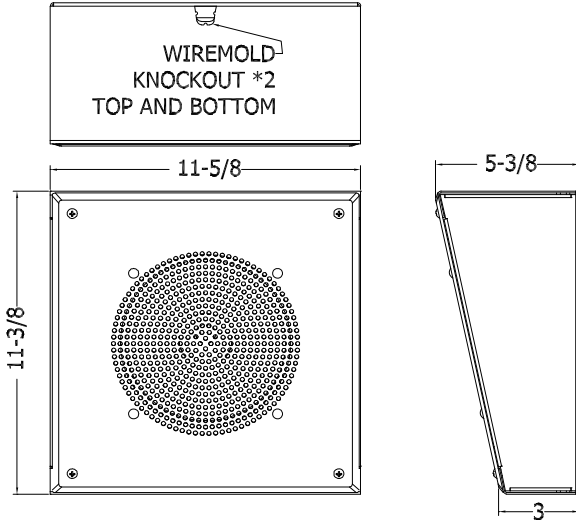

GENERAL DESCRIPTION

The QUAM SYSTEM 2 is a complete loudspeaker assembly with a 8" O.D. , full range speaker, 5W- 25/70.7V pigtail transformer, 22 gage steel baffle and 16 gage slanted enclosure.

Finish: White baked epoxy hybrid.

INTENDED USE

Indoor environment

Vertical surface mount, downward firing

Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

Loudspeaker	8C5PAX
Transformer	5W*, 25/70.7V pigtail (TBLU)
Baffle	BS8W
Enclosure	SE2WVP

* 5W, 2.5W, 1.25W, 0.63W, 0.31W

AUDIO SPECIFICATIONS

Average Sensitivity	92 dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Calculated Maximum System Output	99 dB SPL, 5W/ 1M
Magnet Type, Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65 Hz - 17 kHz EIA 462A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637

Phone: (800) NEED NOW Fax: (888) NEED NOW

(800) 633 - 3669 (888) 633 - 3669

E-Mail: neednow@qnc.com www.quamspeakers.com

