




Quam

SYSTEM 33 SYSTEM 33R SYSTEM 33Y Bi-Directional Wall Mount Paging Loudspeaker 2-1/2" Cone Speaker

01
LOUDSPEAKER ASSEMBLIES

0102 - SURFACE MOUNTED SPEAKER SYSTEM

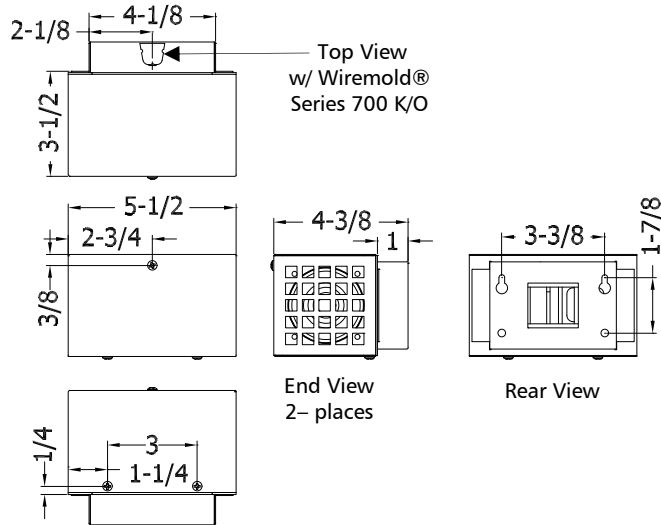

GENERAL DESCRIPTION

The Quam SYSTEM 33x is a complete, bi-directional surface mounted paging loudspeaker assembly with one 2-1/2" frame, moisture-resistant loudspeaker, 25/70.7V transformer and CRS enclosure and mount pedestal.

Finish: Enclosure: White baked epoxy hybrid
Special Order: Safety Red, Safety Yellow
Mount pedestal: Black baked epoxy hybrid

INTENDED USE

Indoor environment– Mounted to wall or ceiling, long axis of the device parallel to the floor plane and traffic flow. Recommended mount height: 8'-0 to 12'-0 AFF. Program Material: Signal tones, voice

SYSTEM COMPONENTS

Loudspeaker	25C25Z80TK
Transformer	TBLU, 5W, 5-taps at -3dB levels

SPECIAL ORDER FINISH - Contact Factory for lead time

Safety Red	Order as SYSTEM33R
Safety Yellow	Order as SYSTEM33Y

RECOMMENDED QUAM ACCESSORY

Drop-ceiling installation:

SSB-1900 *or* Load-bearing support bridge
SSB-1900DEEP '1900' electrical junction box

AUDIO SPECIFICATIONS

Speaker Size	2-1/2" frame
Average Sensitivity	87 dB SPL, 1W/ 1M
Loudspeaker Power Rating	4W RMS, EIA 426A Standard
Calculated Maximum System Output	94 dB SPL, 5W/ 1M
Magnet Type, Weight	BeFe Ceramic, 2.35 oz. Nominal
Frequency Response	220Hz - 6 kHz EIA 462A Standard
Nominal Coverage Angle (Wall Mount position)	Vertical: 90° Included Angle, Horizontal: 45° Included Angle -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtaills, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
Phone: (800) NEED NOW Fax: (888) NEED NOW
(800) 633 - 3669 (888) 633 - 3669
E-Mail: neednow@qnc.com www.quamspeakers.com

