




Quam

SYSTEM 3/x Wall Mount, Square, Slanted, White


SYSTEM 4/x Wall Mount, Square, Slanted, Black

01
LOUDSPEAKER ASSEMBLIES

0102- SURFACE MOUNTED SPEAKER SYSTEMS

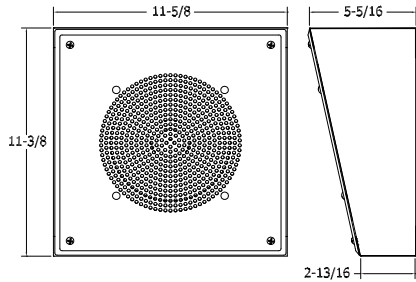

SYSTEM 3, 3/VC

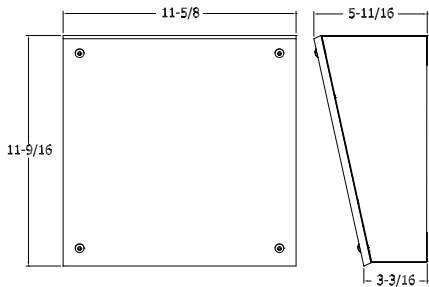

SYSTEM 4, 4/VC



SYSTEM 4 Shown

GENERAL DESCRIPTION

The QUAM SYSTEM 3/x is a complete loudspeaker assembly with a 8" O.D., full range speaker, 5W- 25/70.7V pigtail transformer, optional volume control, 22 gage steel baffle and slanted enclosure.
Finish: White baked epoxy hybrid.

The QUAM SYSTEM 4/x is a complete loudspeaker assembly with an industry standard 8", full range loudspeaker, 5W- 25/70.7V pigtail transformer, optional volume control, wood baffle with cloth wrapped grille and 22 gage steel slanted enclosure.
Finish: Black baked epoxy hybrid enclosure, wood baffle, charcoal gray cloth wrap.

AUDIO SPECIFICATIONS

Average Sensitivity	92 dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Calculated Maximum System Output	99 dB SPL, 5W/ 1M
Magnet Type, Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65Hz - 17 kHz EIA 462A Standard
Nominal Coverage Angle:	100° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection:	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

INTENDED USE

Vertical surface mount, downward firing, interior environment
Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

Loudspeaker	8C5PAX
Transformer	5W*, 25/70.7V pigtail (TBLU)

*5W, 2.5W, 1.25W, 0.63W, 0.31W

With Attenuator:

	Order as SYSTEM 3/VC
	Order as SYSTEM 4/VC

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
Phone: (800) NEED NOW Fax: (888) NEED NOW
(800) 633 - 3669 (888) 633 - 3669
E-Mail: neednow@qnc.com www.quamspeakers.com

