





Quam

SYSTEM 8/VC Shallow, Surface Mount Loudspeaker

01

LOUDSPEAKER ASSEMBLIES

0102 - SURFACE MOUNTED SPEAKER SYSTEMS

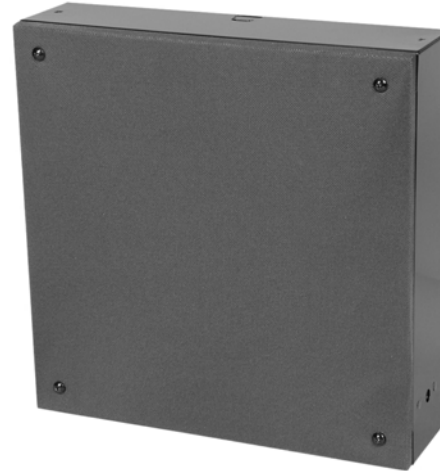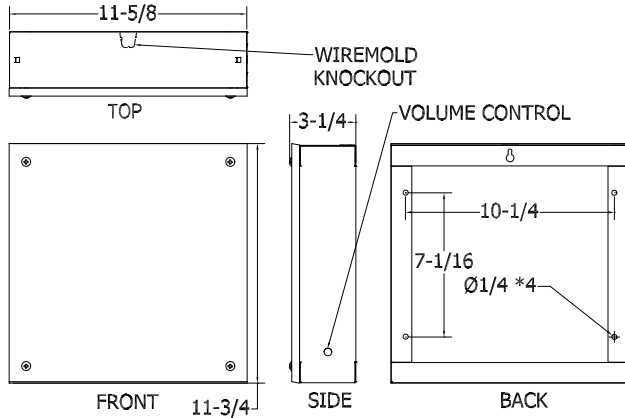

GENERAL DESCRIPTION

The Quam SYSTEM 8/VC is a complete loudspeaker assembly with 8" frame loudspeaker, 25 and 70.7V universal transformer, charcoal gray cloth baffle and CRS enclosure. Finish: Black baked epoxy hybrid.

INTENDED USE

Indoor environment, surface mount
Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

Loudspeaker	8C5PAX
Transformer	TBLU- 5W, 25 and 70.7V 5 taps at -3 dB levels
Baffle/ Enclosure	SYSTEM 8/VC
Attenuator	Model VC- Continuous

RECOMMENDED ADDITIONAL QUAM COMPONENTS

N/A

AUDIO SPECIFICATIONS

Speaker Size	8" frame
Average Sensitivity	92dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Calculated Maximum System Output	99 dB SPL, 5W/ 1M
Magnet Type, Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65 Hz - 17 kHz EIA 462A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
Phone: (800) NEED NOW Fax: (888) NEED NOW
(800) 633 - 3669 (888) 633 - 3669
E-Mail: neednow@qnc.com www.quamspeakers.com

