




# Quam


## C5/BU/CK1/x

### Clock Baffle with Speaker, 25-70.7V Transformer

#### 0102 - SURFACE MOUNTED LOUDSPEAKER SYSTEM

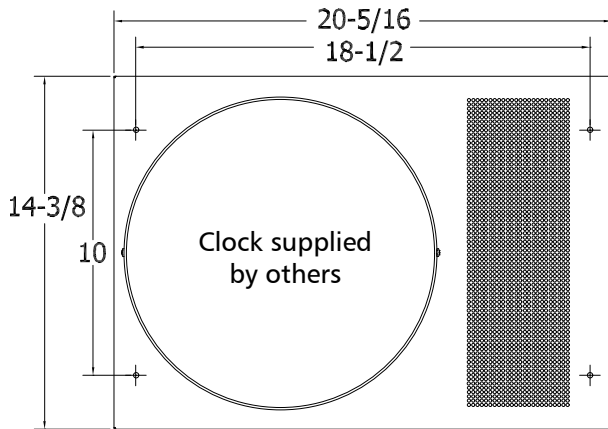

Loudspeaker Baffle shown  
in 'RIGHT' position



Loudspeaker Baffle shown  
in 'Down' position

#### GENERAL DESCRIPTION

The Quam C5/BU/CK1/x is a steel clock baffle with 8" frame loudspeaker, 25 and 70.7V universal transformer. Clock mechanism is supplied by others. Finish: White baked epoxy hybrid.

#### INTENDED USE

Used with listed analog repeater clock mechanisms supplied by others. Loudspeaker may be oriented up, down, left or right of the display; indoor environment. Program Material: Music, voice and signal tones

#### LISTED SUPPLIERS

For DuKane® system	Order as: C5/BU/CK1/D
For Sapling® system	Order as: C5/BU/CK1/S

#### SYSTEM COMPONENTS:

Loudspeaker	8C5PAX
Transformer	TBLU (5W, 25 and 70.7V, 5 taps at -3dB levels)

#### REQUIRED ADDITIONAL QUAM COMPONENT

Section 0401.2- ES8-CK Flush mount box for CK1 baffle  
-or-

Section 0403- SE9W Surface mount box for CK1 baffle

#### AUDIO SPECIFICATIONS

Speaker Size	8" Frame
Average Sensitivity	92 dB-SPL, 1W/1M
Power Rating	12W RMS, EIA 426A Standard
Calculated Maximum System Output	99 dB-SPL, 5W/1M
Magnet Type, Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65Hz- 17 kHz, EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB/2 kHz, Half Space
Audio Connection	7" Long Tinned Wires, Pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: [www.quamspeakers.com](http://www.quamspeakers.com)

LOUDSPEAKER ASSEMBLIES 01

#### Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637  
Phone: (800) NEED NOW Fax: (888) NEED NOW  
(800) 633 - 3669 (888) 633 - 3669  
E-Mail: [neednow@qnc.com](mailto:neednow@qnc.com) [www.quamspeakers.com](http://www.quamspeakers.com)

