



Quam


SYSTEM 1VP

Wall Mount, Square, White


SYSTEM 2VP

Wall Mount, Slanted, White

060 I – VANDAL RESISTANT SPEAKER ASSEMBLIES

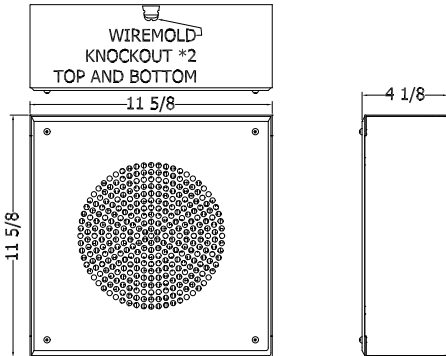

SYSTEM 1VP SHOWN

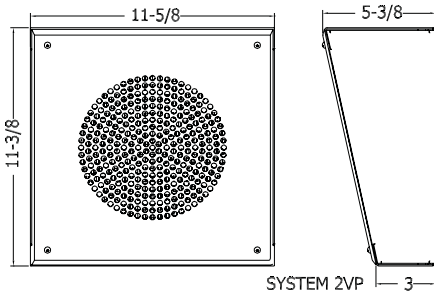

SYSTEM 2VP



SYSTEM 2VP SHOWN

GENERAL DESCRIPTION

The Quam SYSTEM 1VP is a square format, vandal-resistant loudspeaker system.

The Quam SYSTEM 2VP is a slanted format, vandal-resistant loudspeaker system.

Both versions are a complete loudspeaker assembly with an industry standard 8" O.D., full range speaker, 5W- 25/70.7V pigtail transformer, 16 gage square steel baffle and enclosure with a steel interwoven security screen mounted between the baffle and the loudspeaker.

Mounting hardware is #8-32 'pin-in-torx'.

Finish: White baked epoxy hybrid

INTENDED USE

Both variants: Protected outdoor or indoor environments

SYSTEM 1VP: Vertical or horizontal surface mount

SYSTEM 2VP: Vertical surface mount, downward firing

Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

Loudspeaker	8C10PAOT
Transformer	5W*, 25/70.7V, pigtail (TBLU)
Baffle	BS8VP

Enclosure

SYSTEM 1VP	SE1WVP
SYSTEM 2VP	SE2WVP

AUDIO SPECIFICATIONS

Average Sensitivity	97 dB SPL, 1W/ 1M
Loudspeaker Power Rating	20W RMS, EIA 426A Standard
Calculated Maximum System Output	104dB SPL, 5W/ 1M
Magnet Type, Weight	BeFe Ceramic, 10 oz. Nominal
Frequency Response	80Hz - 17 kHz EIA 462A Standard
Nominal Coverage Angle	100° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and Guide Specs are available in various formats in the A&E Resources Section at: www.quamspeakers.com

06 CORRECTION / DETENTION

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637

Phone: (800) NEED NOW Fax: (888) NEED NOW

(800) 633 - 3669 (888) 633 - 3669

E-Mail: neednow@qnc.com www.quamspeakers.com

