




Quam

SYSTEM 3/x Wall Mount, Square, Slanted, White


SYSTEM 4/x Wall Mount, Square, Slanted, Black

01
LOUDSPEAKER ASSEMBLIES

0102- SURFACE MOUNTED SPEAKER SYSTEMS

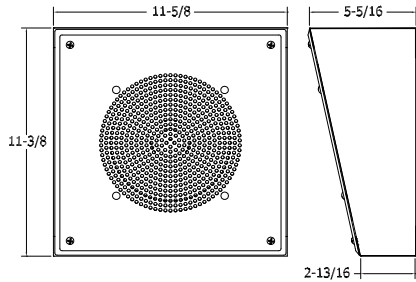

SYSTEM 3, 3/VC

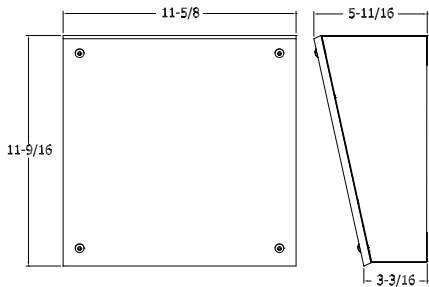

SYSTEM 4, 4/VC



SYSTEM 4 Shown

GENERAL DESCRIPTION

The Quam SYSTEM 3/x - SYSTEM 4/x is a complete loudspeaker assembly in a 22 gage slanted steel enclosure with 8" frame loudspeaker, 25/70.7V universal transformer. Available with continuous attenuator at additional cost; see below.

Finish options:

- SYSTEM 3/x: White baked epoxy hybrid enclosure, Perforated steel grille
- SYSTEM 4/x: Black baked epoxy hybrid enclosure, Wood baffle, Charcoal gray cloth wrap

INTENDED USE

Vertical surface mount, downward firing, interior environment

Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

Loudspeaker	8C5PAX
Transformer	TBLU- 5W, 25/70.7V, 5 taps at -3 dB levels
With Attenuator	Order as SYSTEM 3/VC Order as SYSTEM 4/VC

AUDIO SPECIFICATIONS

Speaker Size	8" frame
Average Sensitivity	92 dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Calculated Maximum System Output	99 dB SPL, 5W/ 1M
Magnet Type, Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65Hz - 17 kHz EIA 462A Standard
Nominal Coverage Angle:	100° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection:	7" color-coded pigtails, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
Phone: (800) NEED NOW Fax: (888) NEED NOW
(800) 633 - 3669 (888) 633 - 3669
E-Mail: neednow@qnc.com www.quamspeakers.com

