




Quam

SYSTEM 6VP Vandal Resistant, Paging Horn Speaker System

0601 - VANDAL RESISTANT SPEAKER ASSEMBLIES

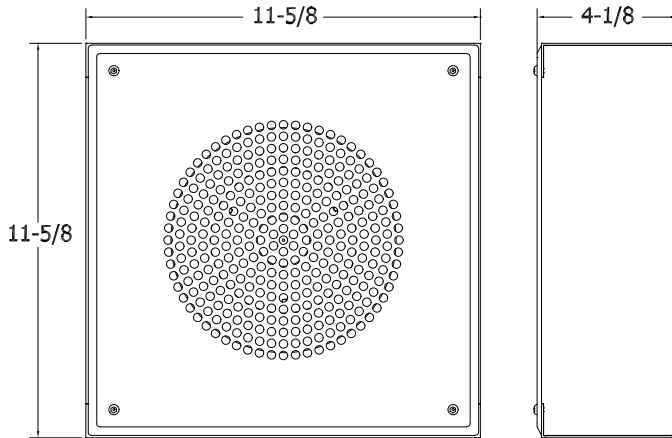

GENERAL DESCRIPTION

The Quam SYSTEM 6VP is a complete loudspeaker assembly with double re-entrant horn, compression type loudspeaker, 25 and 70.7V universal transformer, baffle is 16 gage steel with vandal-resistant internal baffle; enclosure is 16 gage CRS with #8-32 'pin-in-hex' hardware.

Finish: White baked epoxy hybrid finish.

INTENDED USE

Outdoor or Indoor environment, vertical or horizontal surface mount

Program Material: Voice and signal tone

SYSTEM COMPONENTS

Loudspeaker:	H16
Transformer:	Integral to unit, 16W, 25 and 70.7V, 5 taps at -3dB levels
Enclosure:	SE1WVP
Baffle:	BS8VP

RECOMMENDED ADDITIONAL QUAM COMPONENTS

- 0602- Vandal Resistant Intercom Assemblies
- 0603- Vandal Resistant Components

AUDIO SPECIFICATIONS:

Speaker Type:	Compression, re-entrant horn
Average Sensitivity:	110 dB-SPL, 1W / 1M
Power rating:	16W-RMS, EIA 426A Standard
Calculated Output:	121dB-SPL, 16W/ 1M
Frequency Response:	350 -10 kHz
Nominal Coverage Angle:	90° Included Angle, -6 dB / 2 kHz, Half Space
Audio Connection:	7" long, color-coded tinned wires, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

CORRECTION / DETENTION

06

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
 Phone: (800) NEED NOW Fax: (888) NEED NOW
 (800) 633 - 3669 (888) 633 - 3669
 E-Mail: neednow@qnc.com www.quamspeakers.com

